

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 July 2003 (10.07.2003)


PCT

(10) International Publication Number
WO 03/055726 A1

- (51) International Patent Classification⁷: **B60R 21/01**, 16/02, B60N 2/04
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **VINCENT, Philippe** [FR/FR]; 7, rue des 4 Vents, F-95690 Nesles la Vallée (FR).
SABOURIN, Pierre [FR/FR]; 11, rue Henri Lechauguette, F-95520 Osny (FR).
- (21) International Application Number: **PCT/SE02/02343**
- (22) International Filing Date:
17 December 2002 (17.12.2002)
- (74) Agent: **MEULLER, Erik**; Autoliv Development AB, S-447 83 Vårgårda (SE).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0200084.2 3 January 2002 (03.01.2002) GB
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (71) Applicant (for all designated States except US): **AUTOLIV DEVELOPMENT AB** [SE/SE]; S-447 00 Vårgårda (SE).
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: A SAFETY ARRANGEMENT

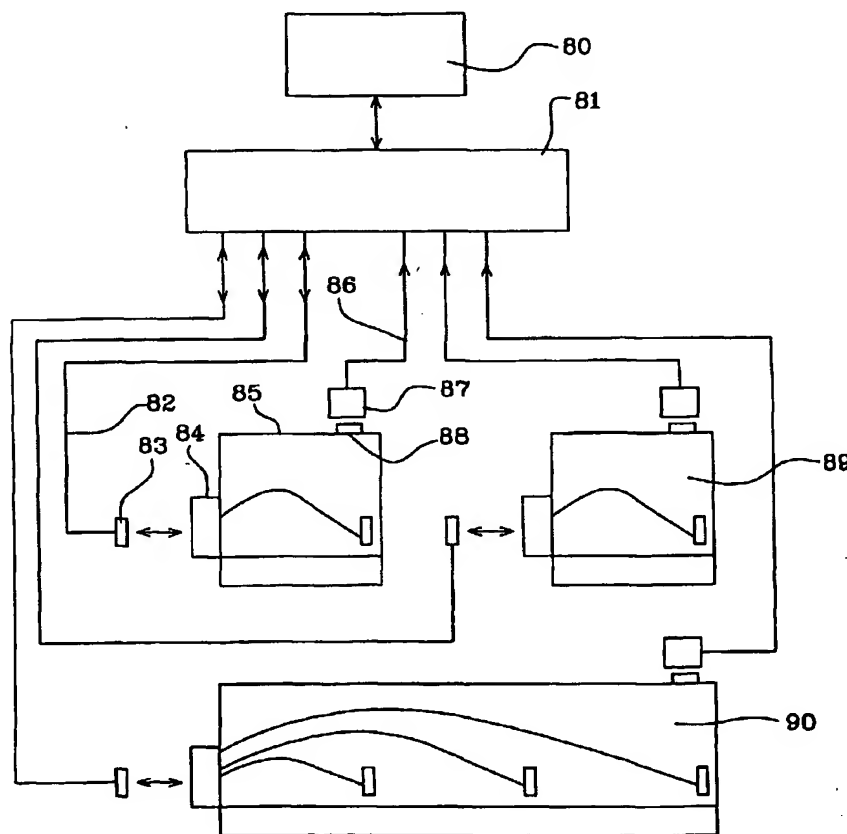

(57) Abstract: A seat (12, 13, 14) which is to be removably mounted in position on tracks (2-5) in a motor vehicle has at least one safety element in the form of an active safety device or sensor. A communication channel is established between a control unit (6) and the safety element. At least part of the communication channel is a wireless link (30, 31, 36, 37). There is a first system which provides a signal to the control unit when the seat is present in the vehicle, and an independent system (70) which is separate from the seat-part of the communication channel, for determining the presence of the seat of the vehicle, and providing an appropriate signal to the control unit (6). The control unit therefore has two signals indicating the presence of the seat.